Laser stabilization for space applications

Bill Klipstein

David J. Seidel
John A. White
Makan Mohageg
Charles A. Greenhall
Brenton C. Young

Quantum Sciences and Technology Group
Jet Propulsion Laboratory

The work described in this paper was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

Relevance to ESE Missions

Laser stabilization is a mission-critical technology for the post-2002 Time-Dependent-Gravity Field Mapping Mission, EX-5 (+ LISA):

Optical metrology for gravitational mapping

Variations in mass distribution of the Earth puts a position-dependent acceleration on the spacecraft, causing a change in relative position.

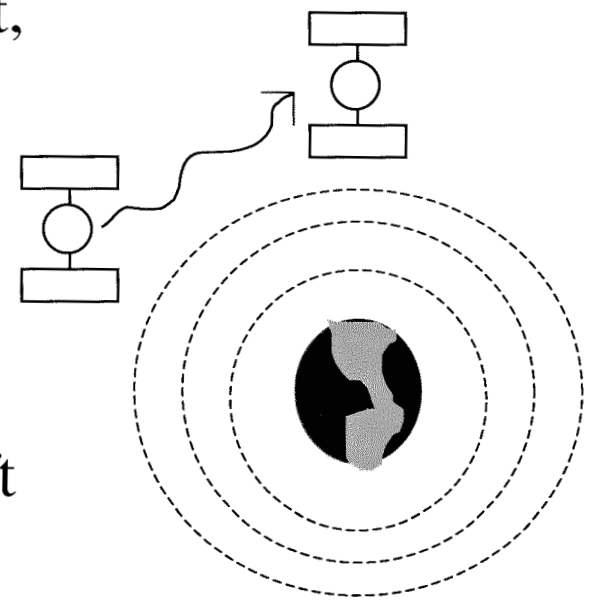

This distinct signature will change as mass distribution changes.

Micrometer-level resolution of relative spacecraft position gives information on mass (water) distribution (polar ice caps, large aquifers, ocean currents).

Metrology with Light

Comparing the phase of the incoming wave with the reference on S2 measures changes in the distance between the two satellites

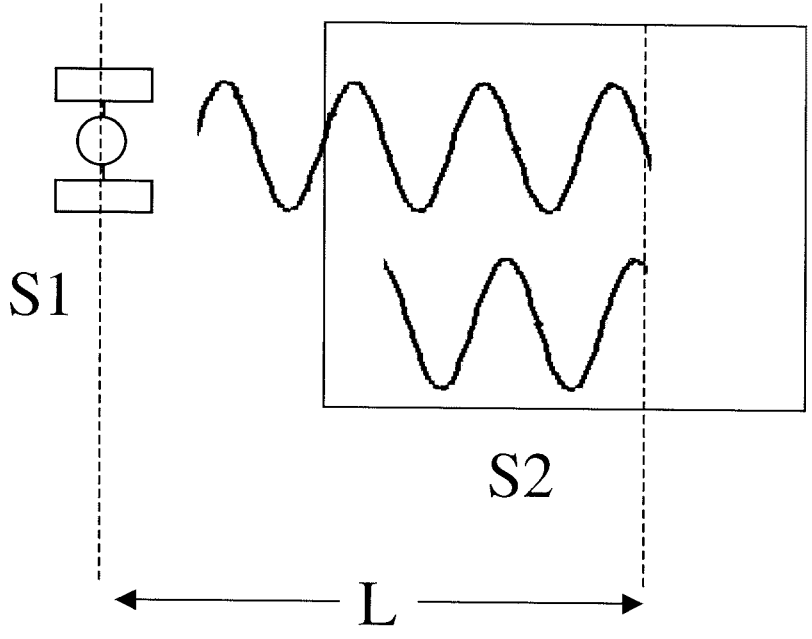

intersatellite distance L

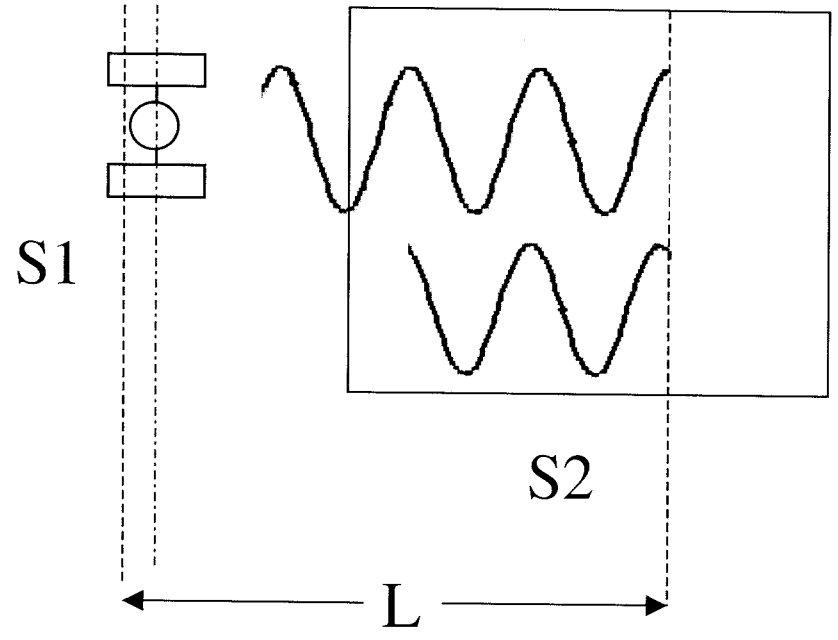

intersatellite distance L-$\lambda/4$

Fluctuations in the laser frequency limit the phase comparison

Benefits of Optical Frequencies

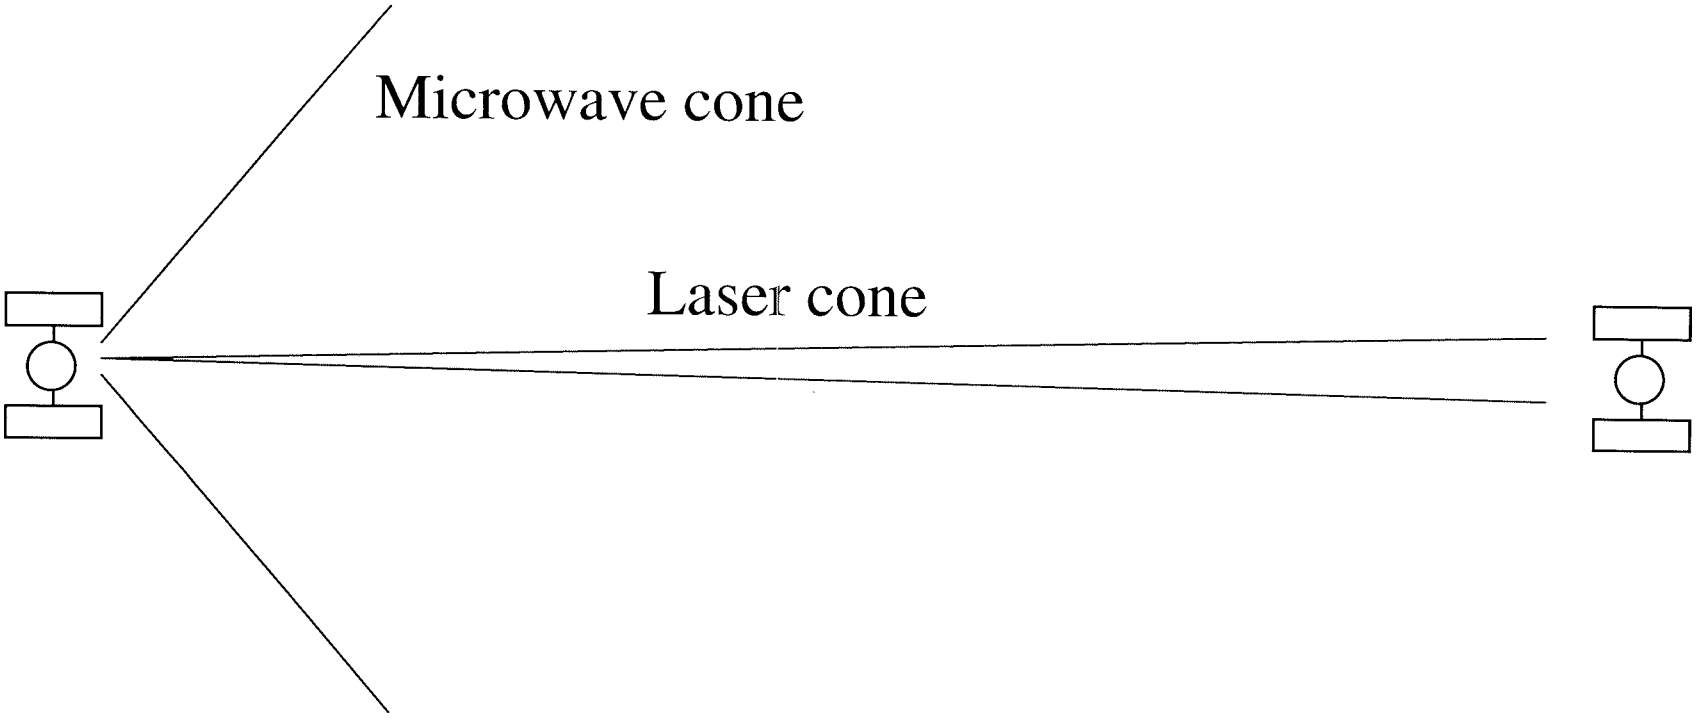

- no multi-path effects (directional)
- well-defined receiver
- direct ranging to test mass
- improved resolution (wavelength reduced by 10,000×)
- much better long-term stability (with atomic reference)

Task Objective

Develop a frequency-stabilized, high power (~100 mW) tunable laser system to support flight metrology, including GRACE 2 (EX-5) and LISA.

Laser stability requirements for EX-5

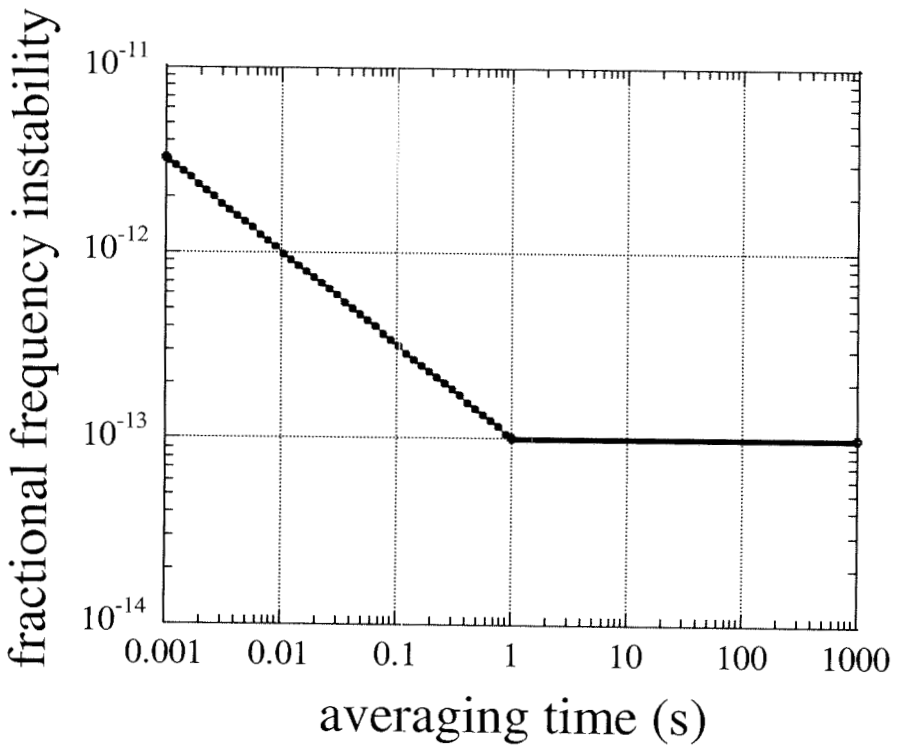

Sensitivity of GRACE and EX-5

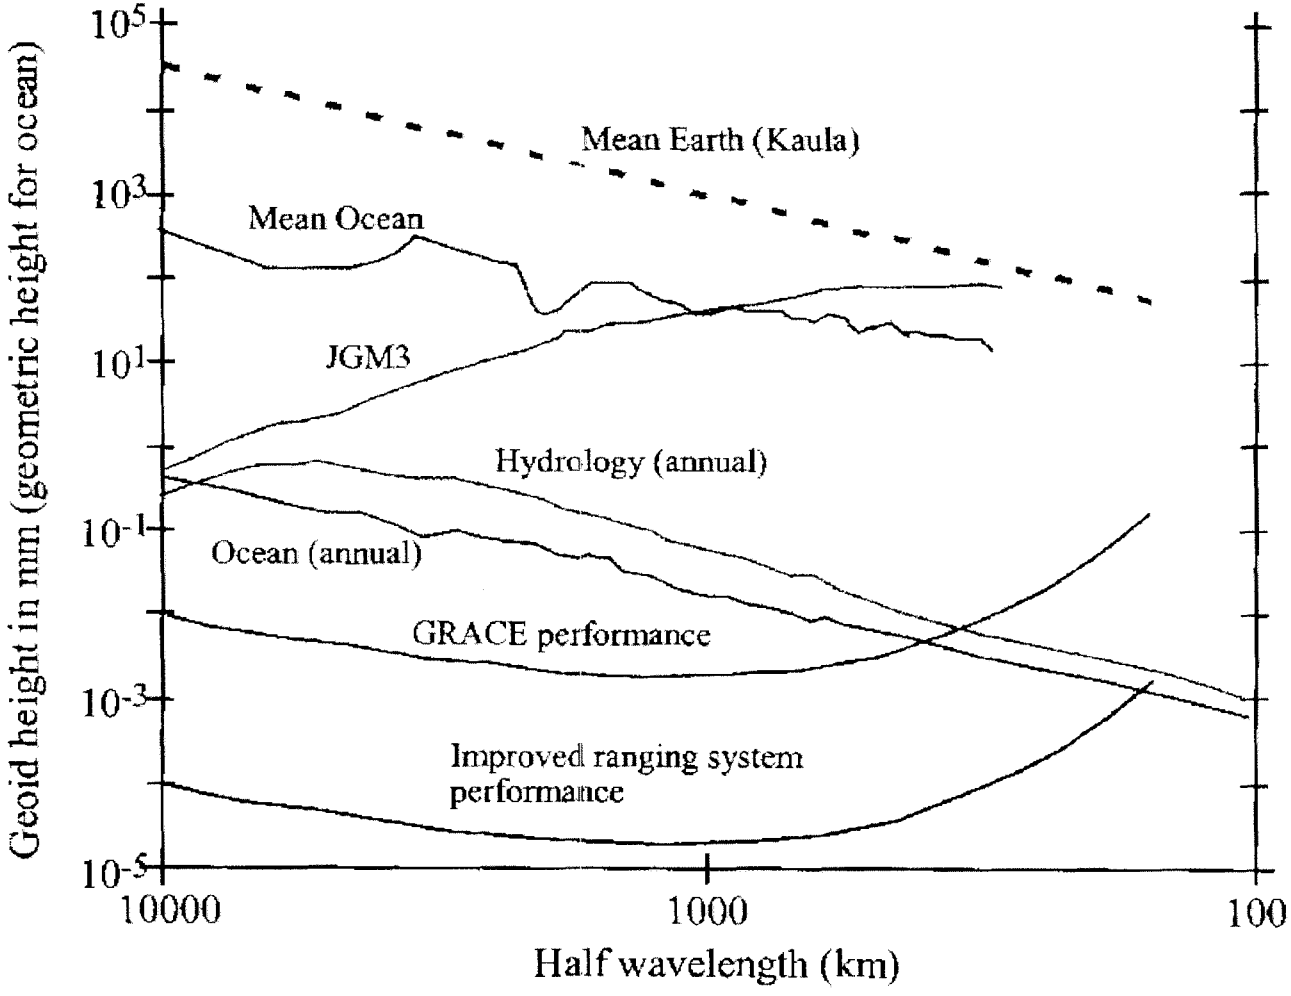

From: M. Watkins, W. M. Folkner, S. Buchman, and B. Tapley, "EX-5: A laser interferometer follow-on to the GRACE Mission," GGG Conference (Banff, Canada, July 2000).

NASA efforts toward laser stabilization

SUNLITE project:

Goal: Space-qualified, stabilized Nd:YAG laser for LISA, astrometry, optical communications, optical clocks, and fundamental physics

- NASA Langley, Stanford, NIST, JILA
- Thermal and mechanical modeling for cavity
- Optical bench design
- Space-qualifiable optical mounts and components
- Good short-term stability, but insufficient long-term stability ($\sim 10^{-11}$ at $\tau = 90$ min) for EX-5

Project Overview: Approach

Parallel approaches to minimize risk, enhance output, and provide greater flexibility to candidate users.

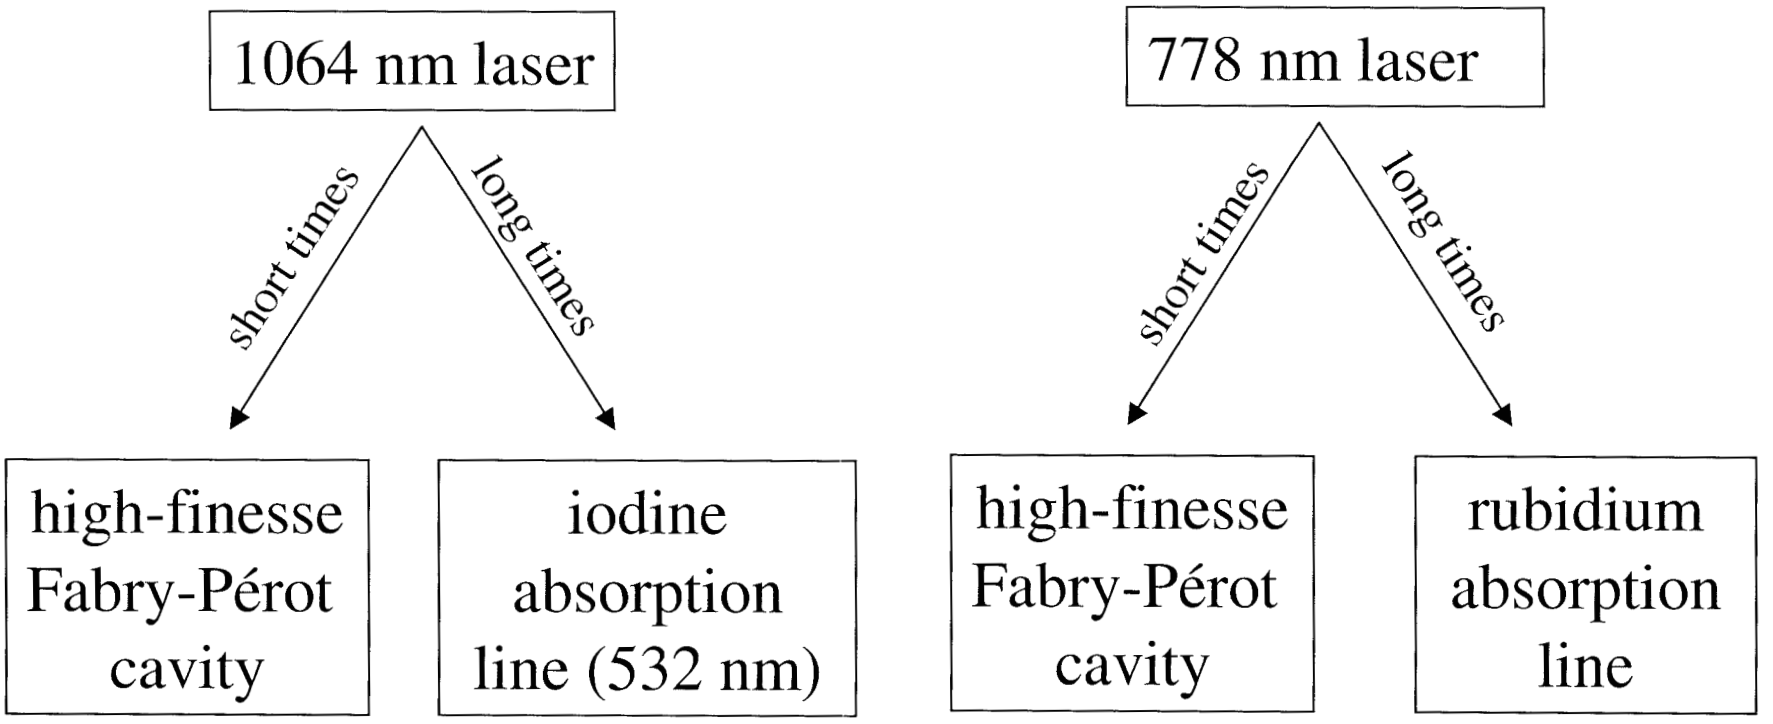

Performance of each system expected to surpass requirements

Fractional frequency instability of lasers

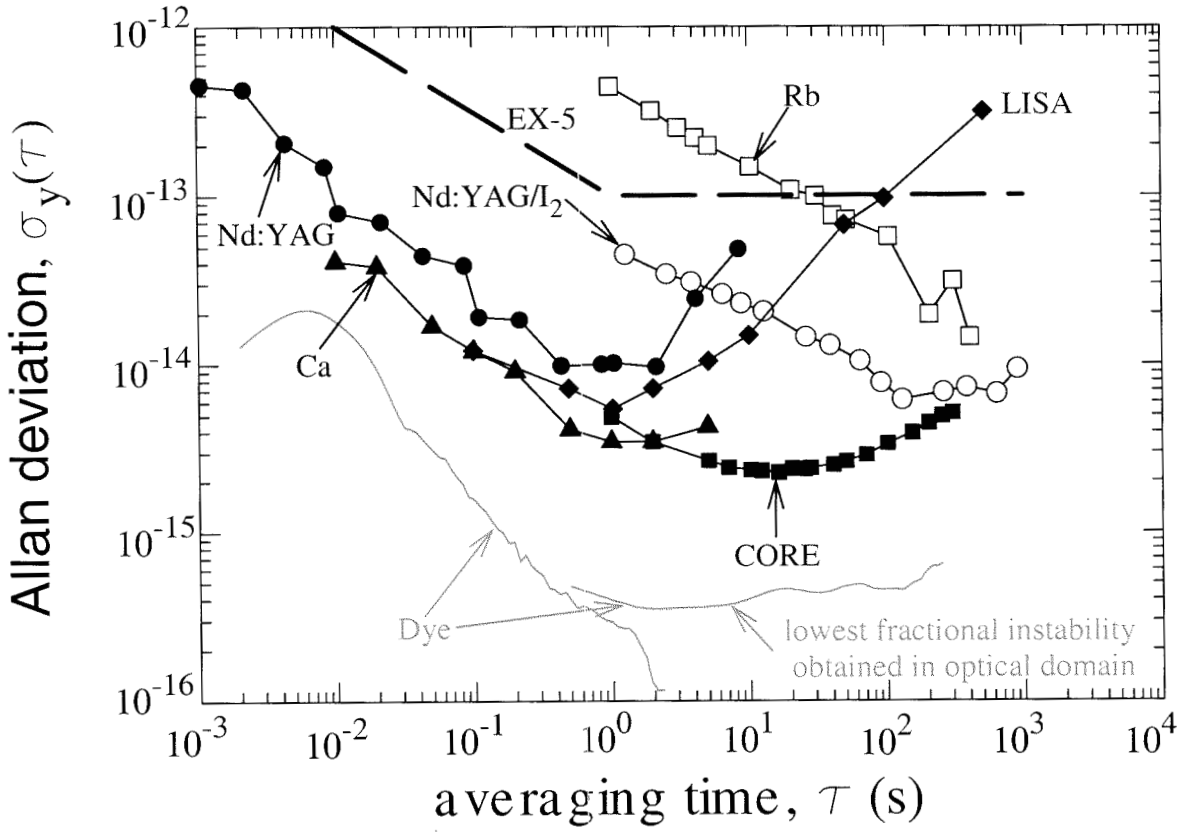

Nd:YAG ----- Sampas *et al.*, Opt. Lett. **18**, 947 (1993)
Nd:YAG/I_2 -- Hall *et al.*, IEEE Trans. Instrum. Meas. **48**, 583 (1999)
Rb ---------- Touahri *et al.*, Optics Comm. **133**, 471 (1997)
Ca ---------- Oates *et al.*, Opt. Lett. **25**, 1603 (2000)
CORE -------- Seel *et al.*, Phys. Rev. Lett. **78**, 4741 (1997)
Dye ---------- Young *et al.*, Phys. Rev. Lett. 82, 3799 (1999)
LISA ---------- Peterseim *et al.*, private communication
EX-5 ---------- EX-5 requirement

Stabilization to I_2 transition at 532 nm

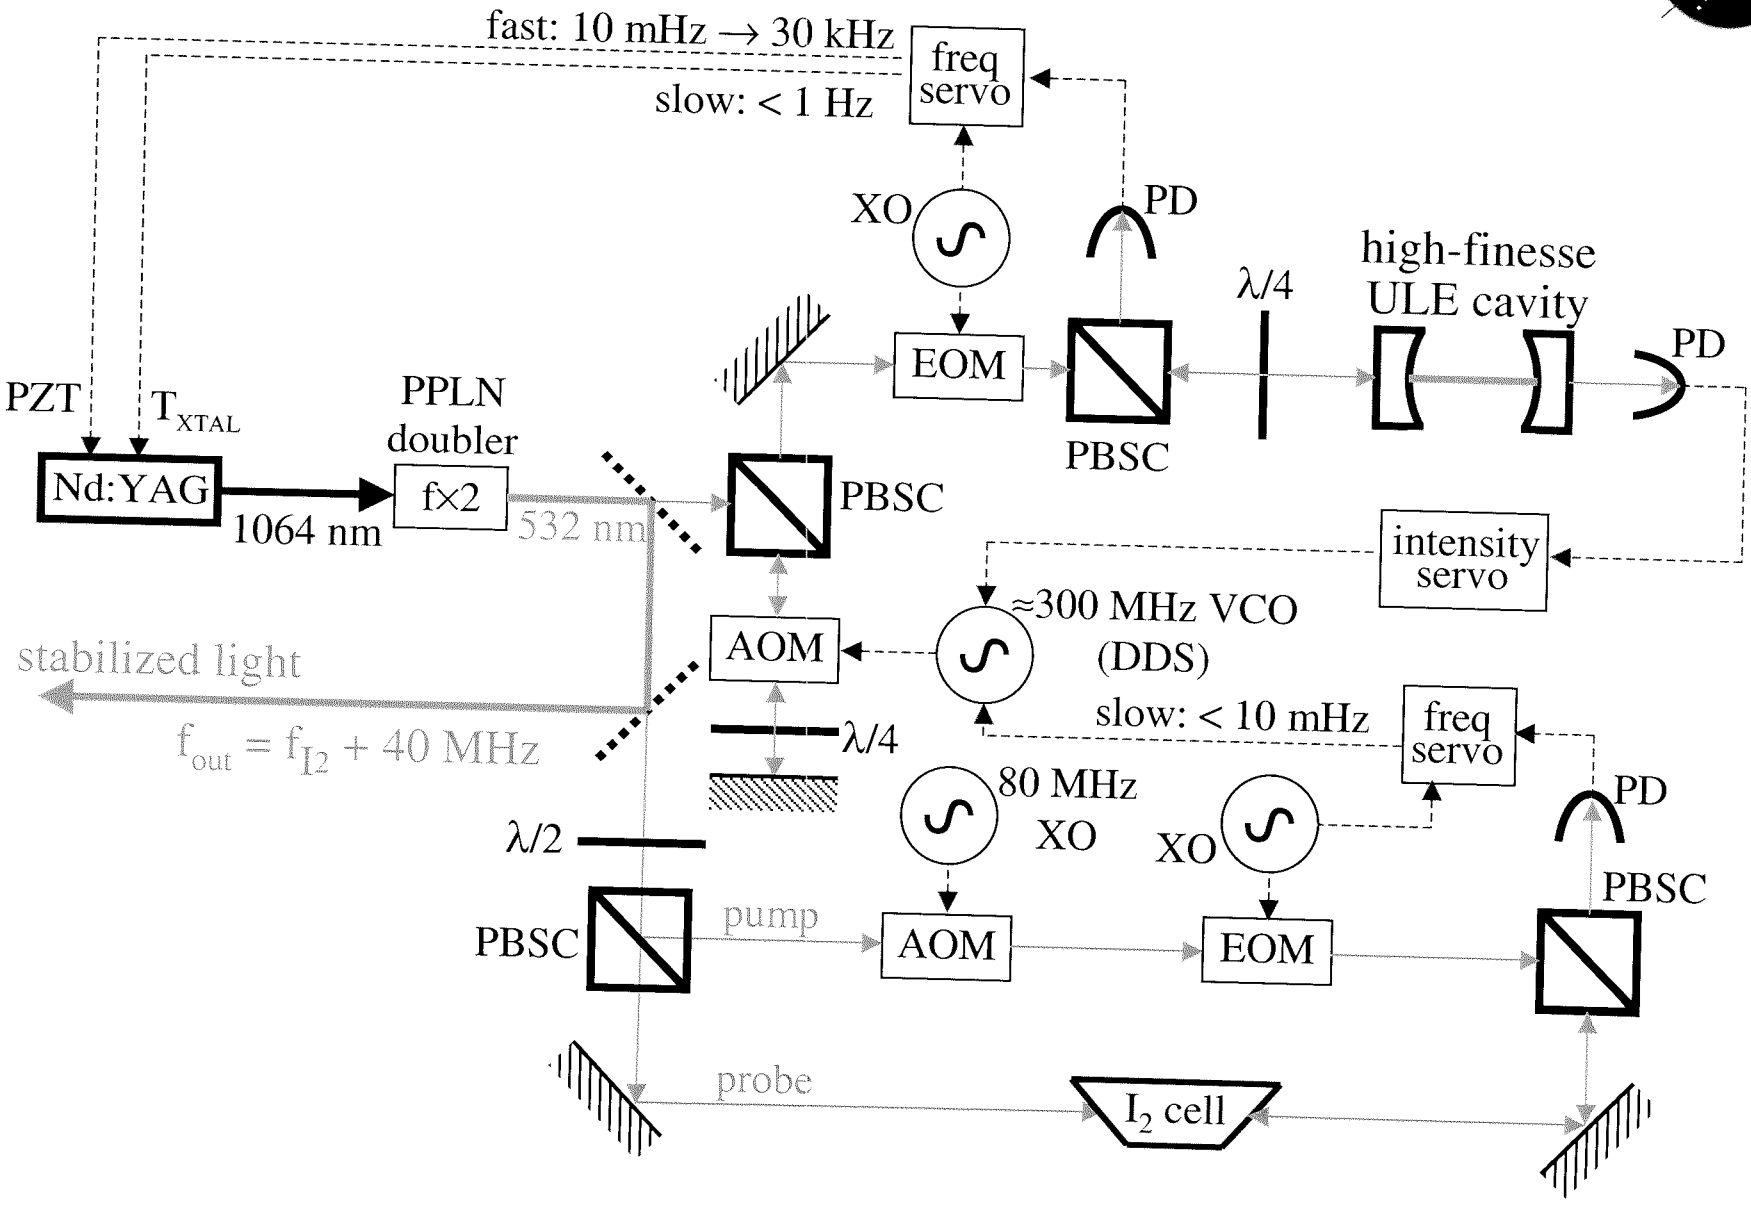

Stabilization to Rb two-photon transition at 778 nm

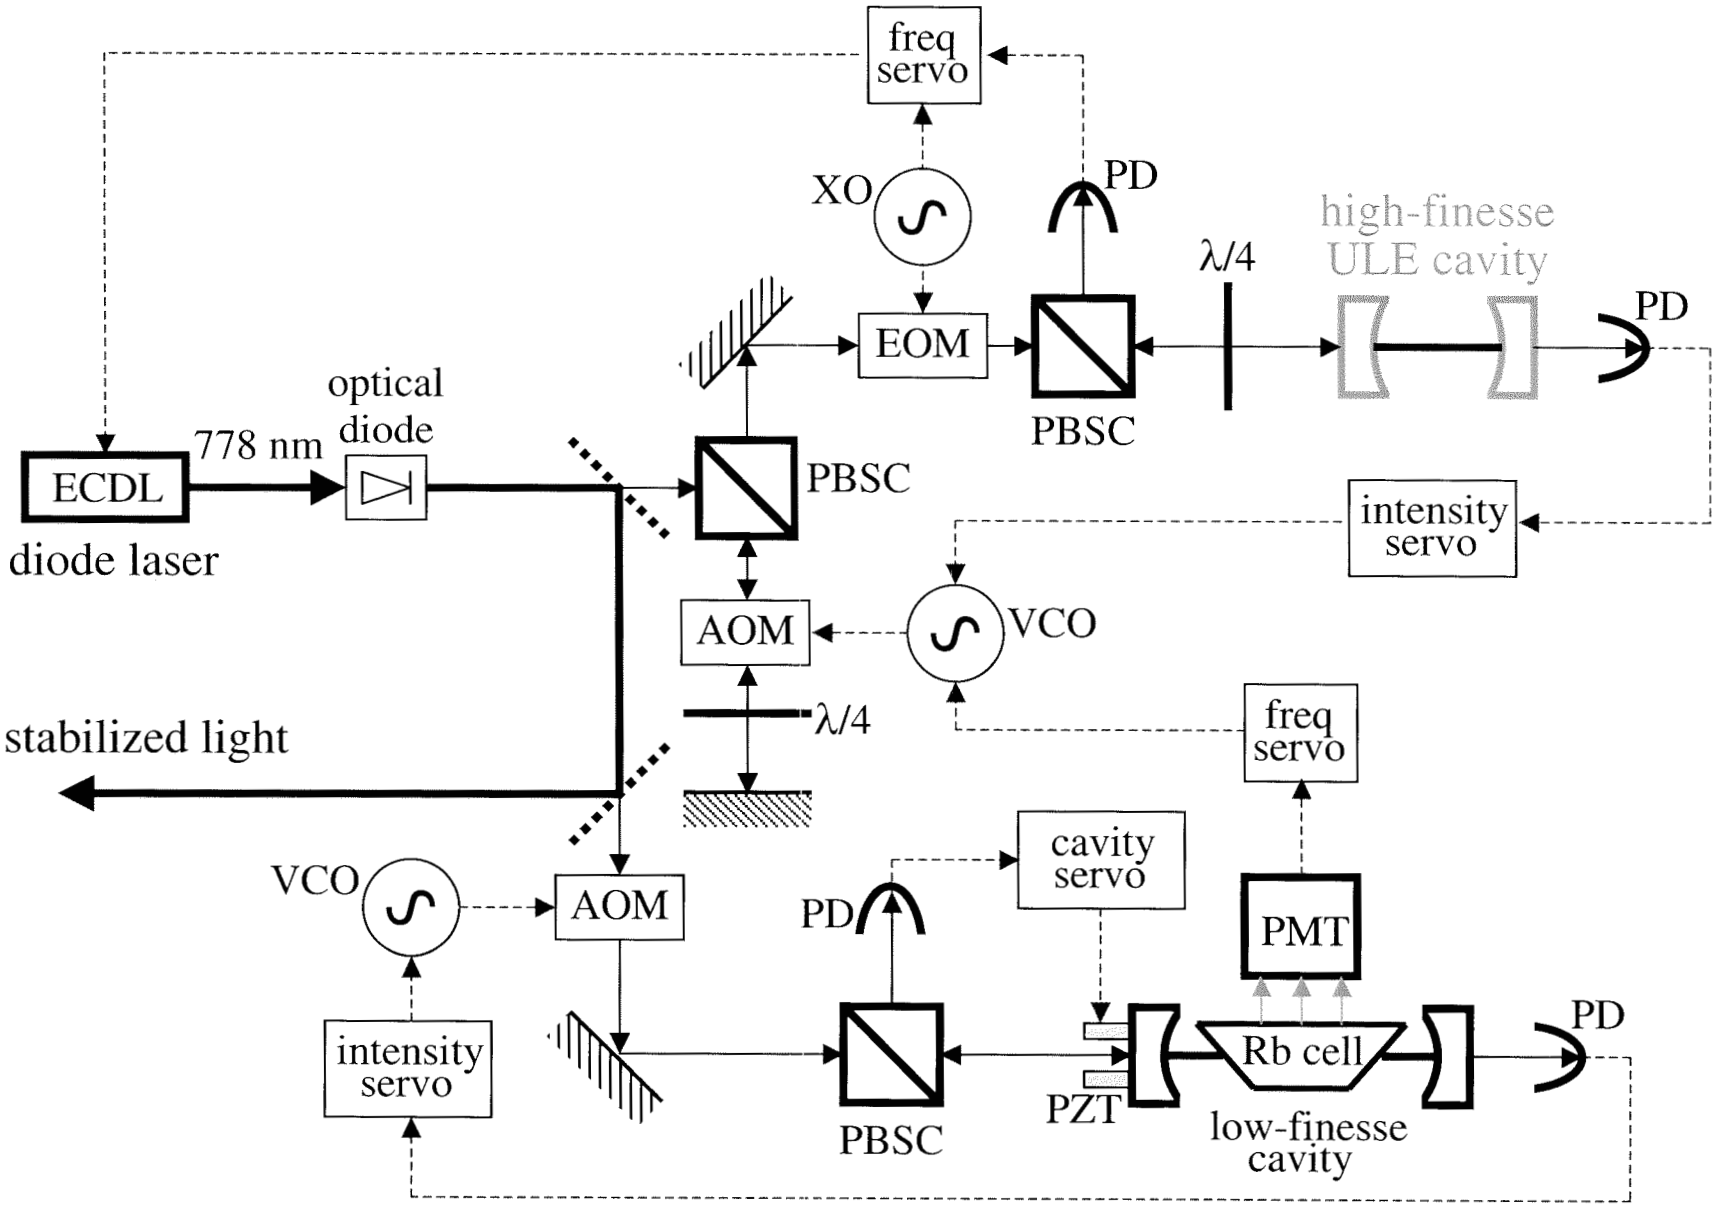

Design of Fabry-Pérot cavity

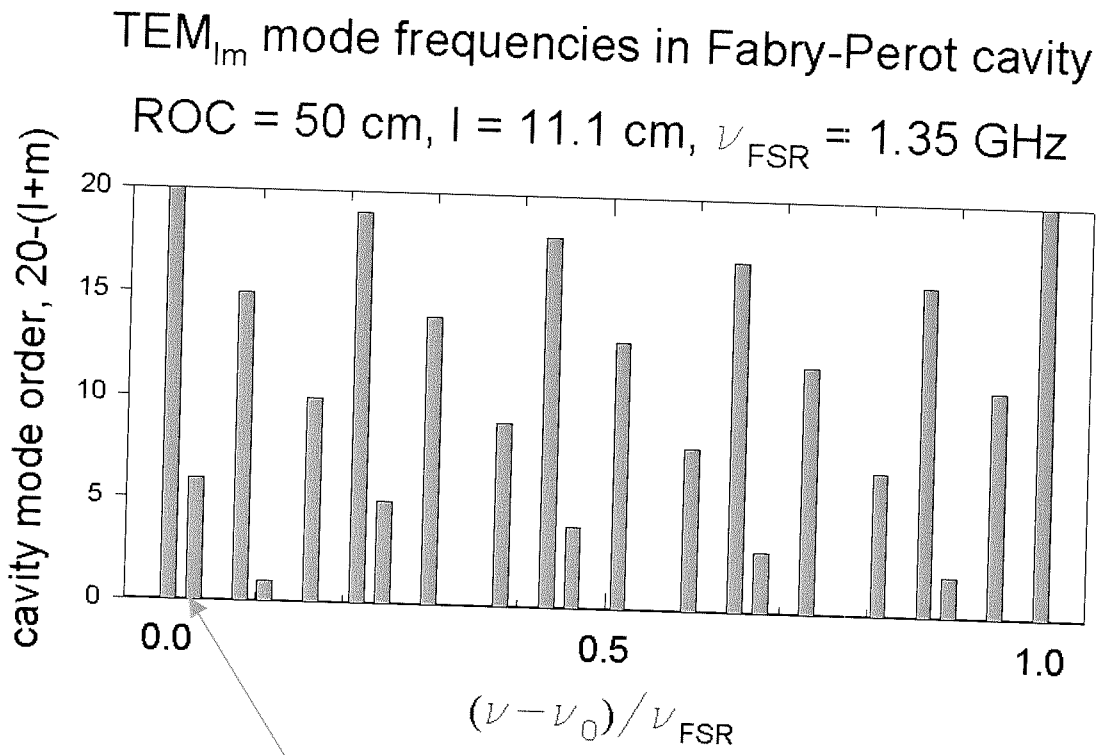

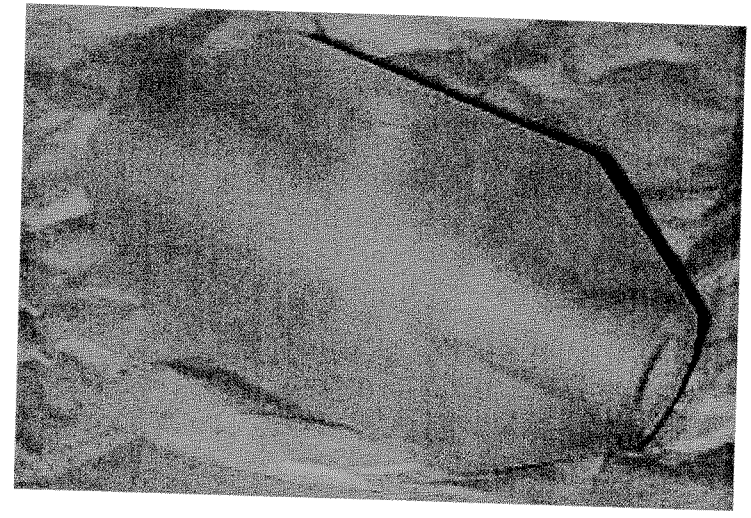

high-finesse mirrors
(F > 150,000)

ULE spacer

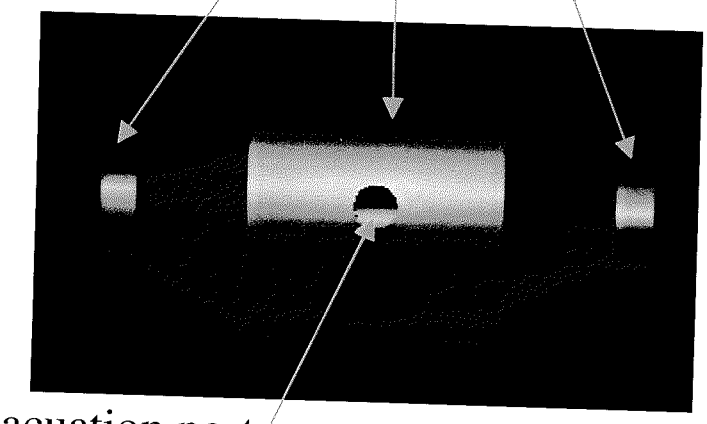

evacuation port

- l+m=14 mode is 39 MHz from TEM_{00} mode
- Cavity shape yields good stiffness/mass ratio
- Longer cavity gives higher Q, but uses lower grade of ULE

Design of Fabry-Pérot cavity

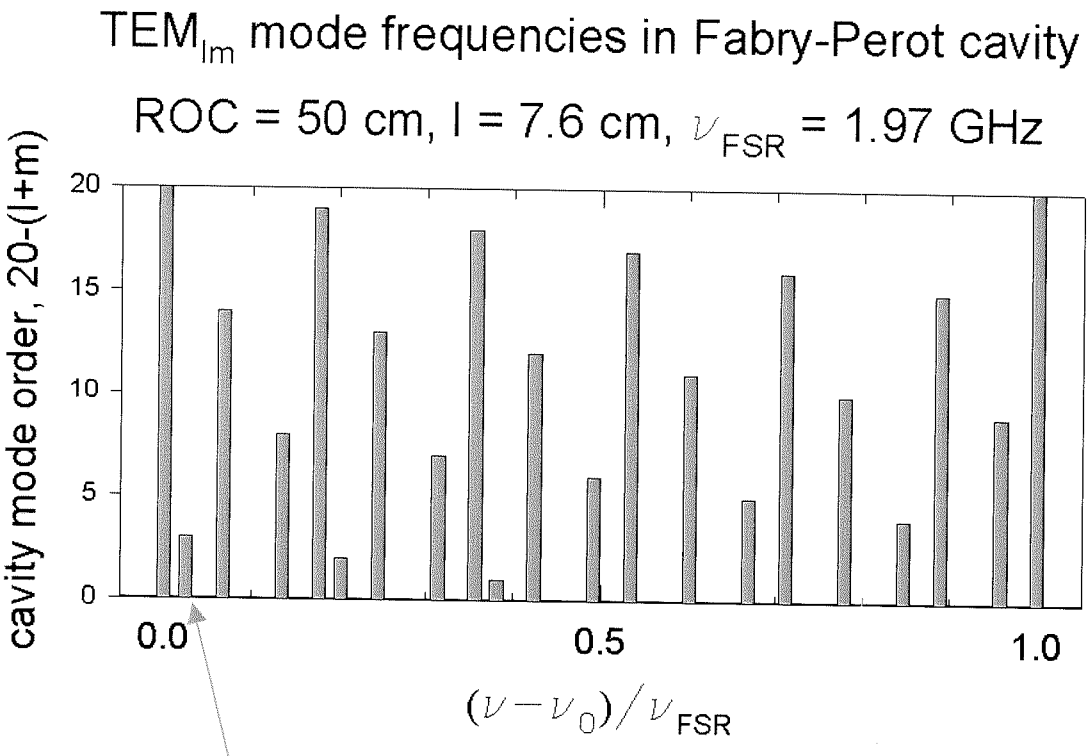

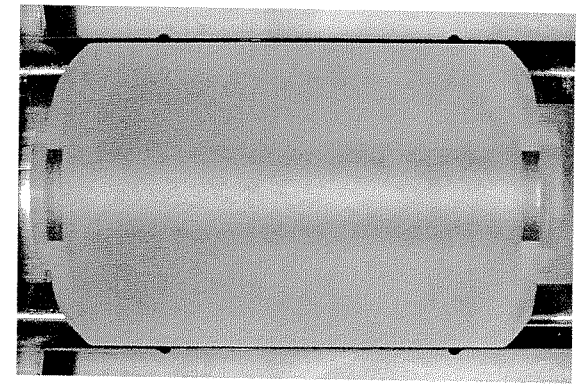

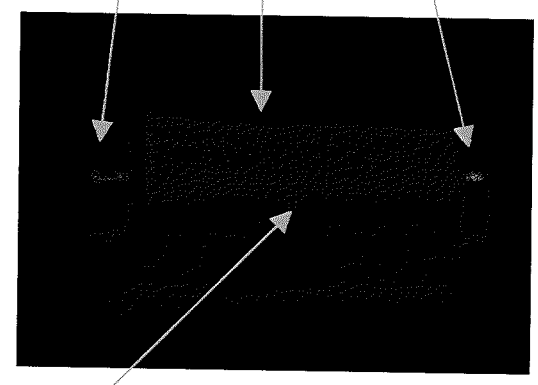

- l+m=17 mode is 49 MHz from TEM_{00} mode
- Shorter cavity has lower Q, but made from higher grade of ULE

Vacuum chamber for Fabry-Pérot cavity

- Parts procured for 4 vacuum systems
- 3 chambers assembled for 532 nm and 778 nm

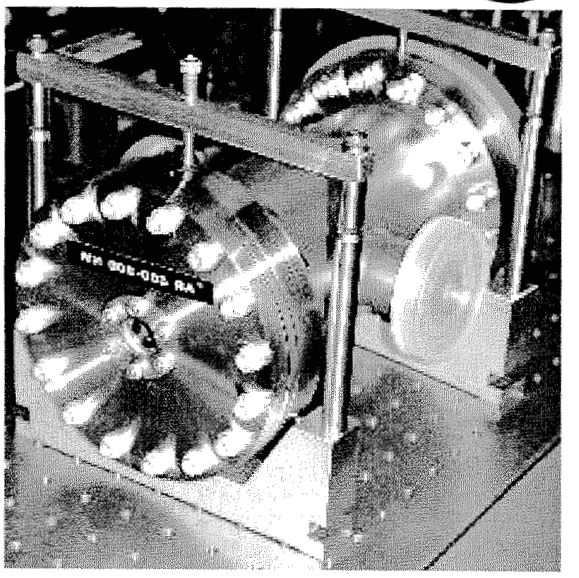

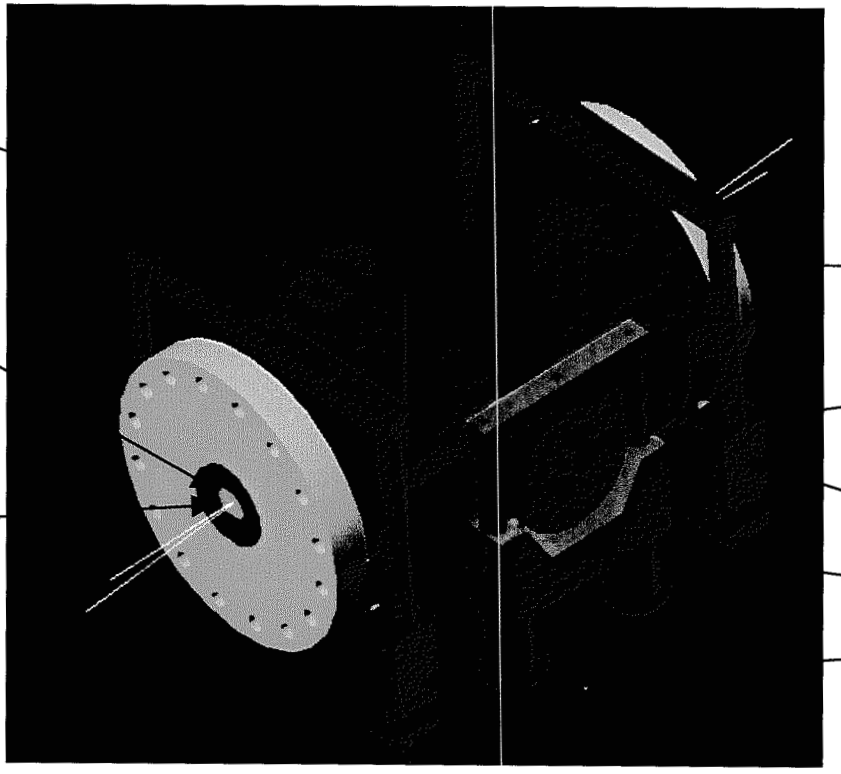

Thermal shield for Fabry-Pérot cavity

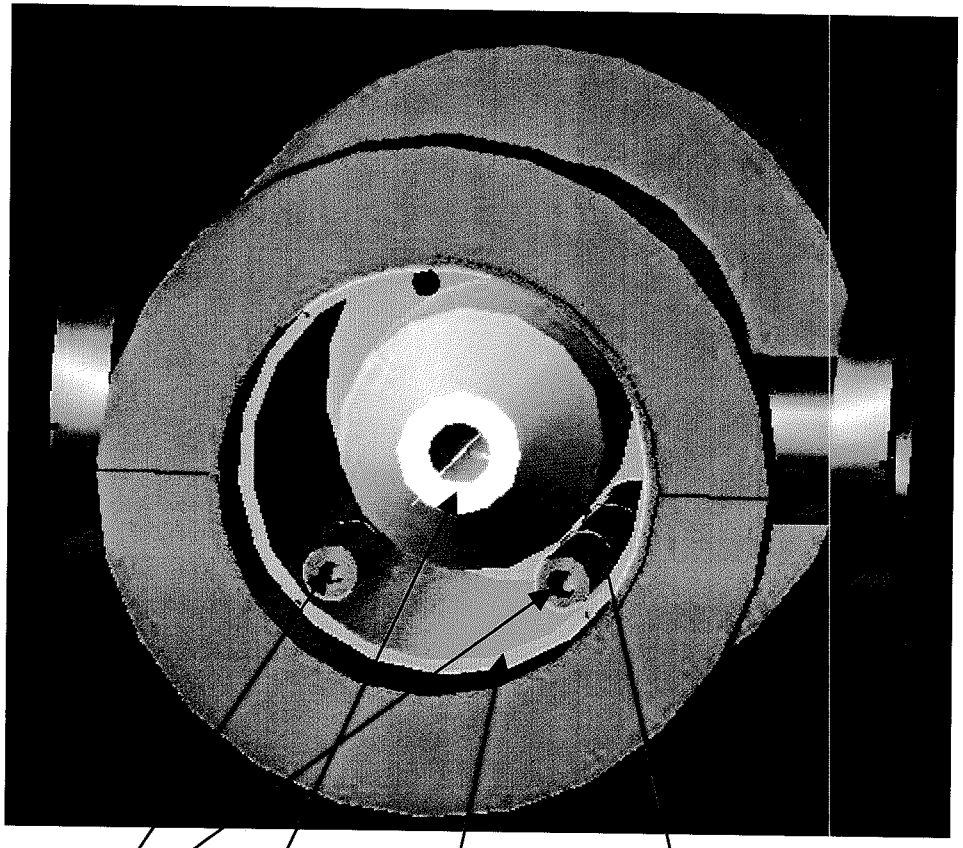

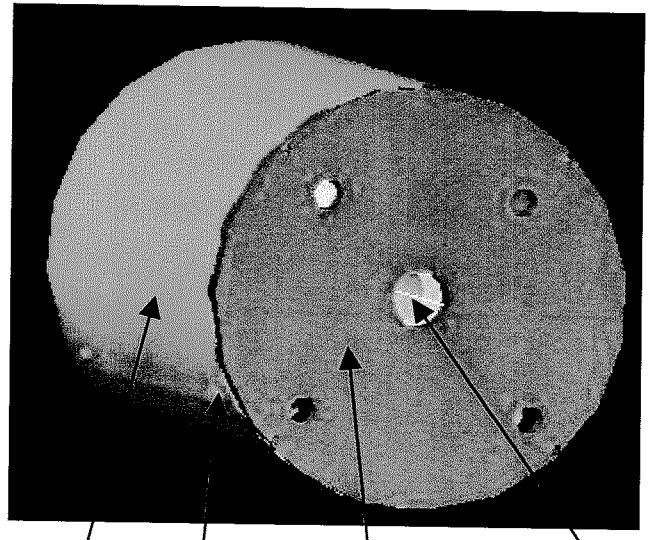

Frequency Doubling

The Nd:YAG laser puts out 1064 nm light, which must be frequency-doubled to 532 nm in a nonlinear crystal to compare to iodine absorption lines

MgO:$LiNbO_3$ or $KNbO_3$ doubling cavity

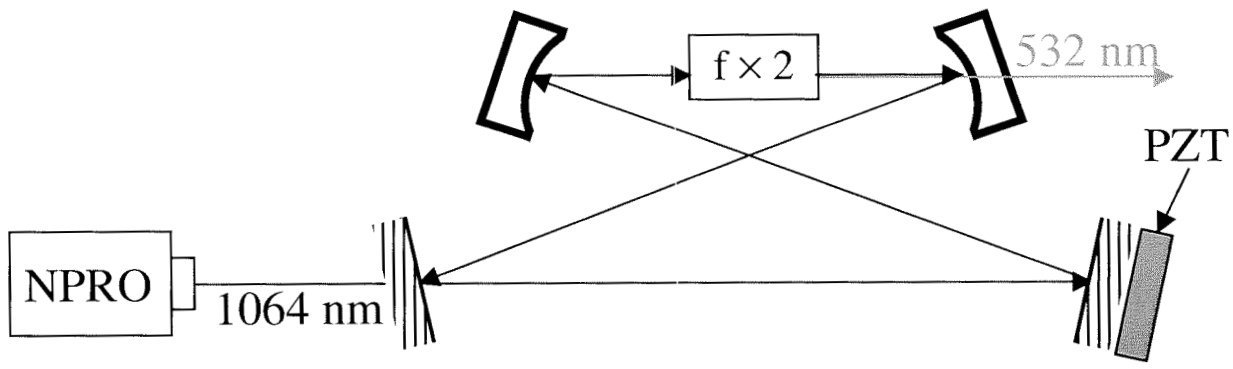

Single-pass PPLN doubler

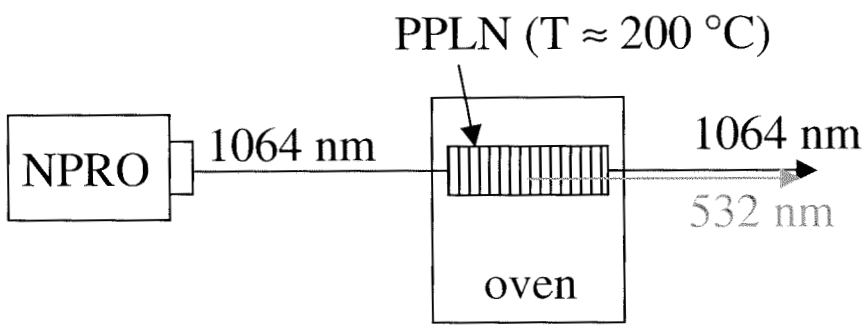

PPLN advantages

- 20× the single-pass power of $LiNbO_3$
- 2× the single-pass power of $KNbO_3$, with 1/4 the temperature sensitivity and 1/40 the angle sensitivity

Frequency Doubling

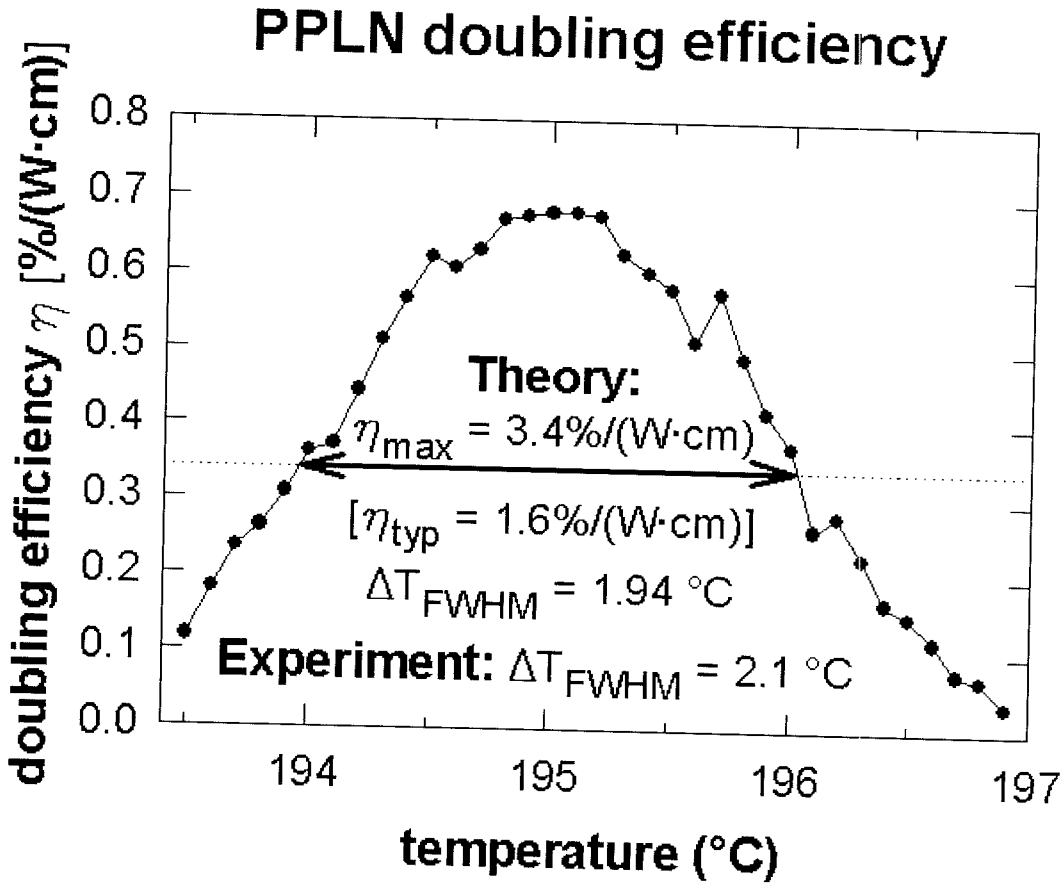

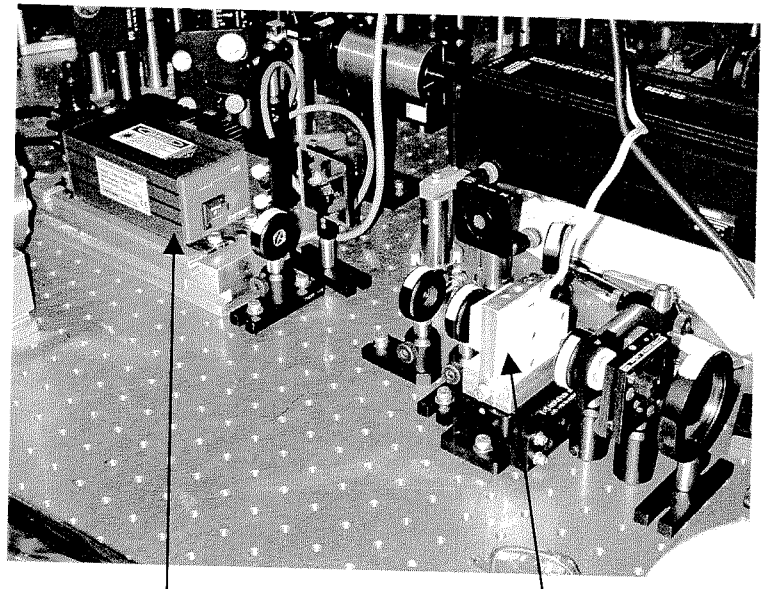

NPRO laser (500 mW @ 1064 nm)

PPLN oven

Iodine Spectroscopy

First fluorescence signal at 532 nm

doubling crystal in oven

iodine vapor cell

Iodine absorption lines observed so far (Doppler only):
1104:a_1 R(57)32-0
1105:a_1 P(54)32-0
1106:a_1 P(119)35-0
1109:a_{21} P(83)33-0

Doppler-free spectroscopy set up

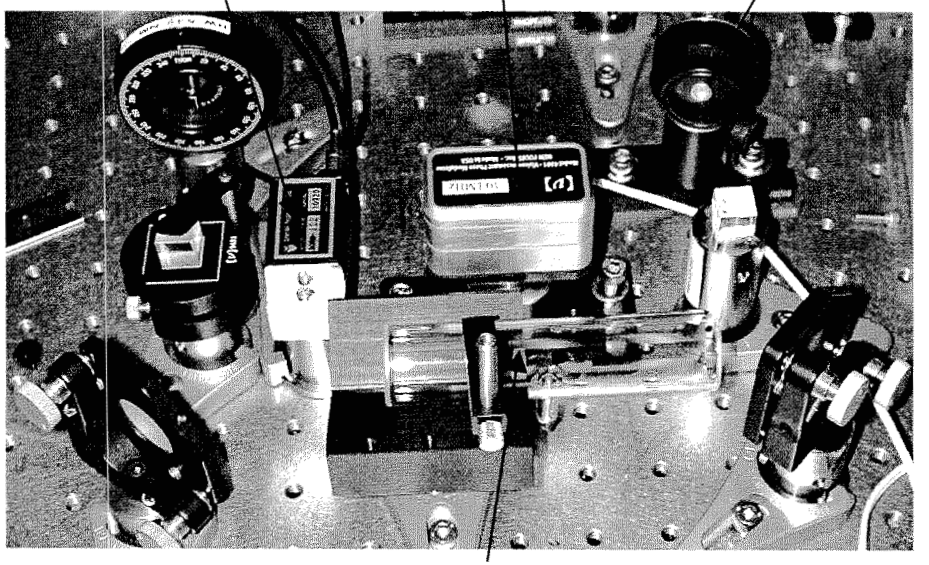

Rubidium 2-photon transition

Rb atoms serve as an absolute frequency reference for the laser

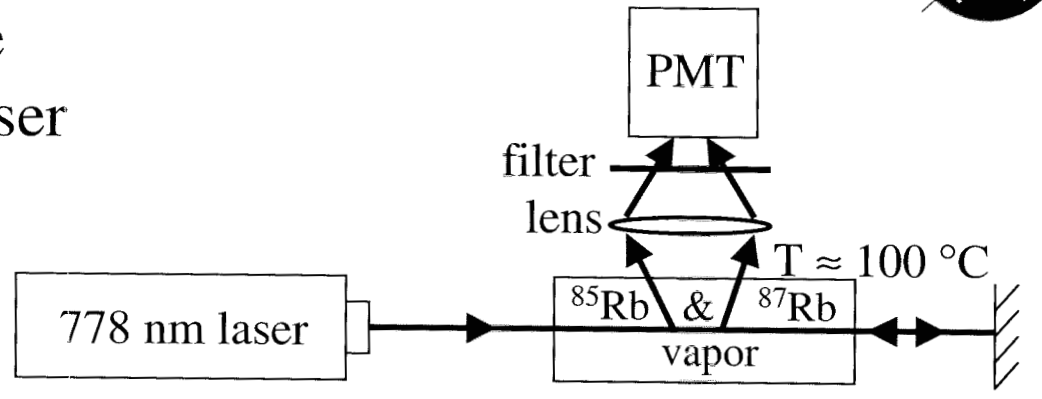

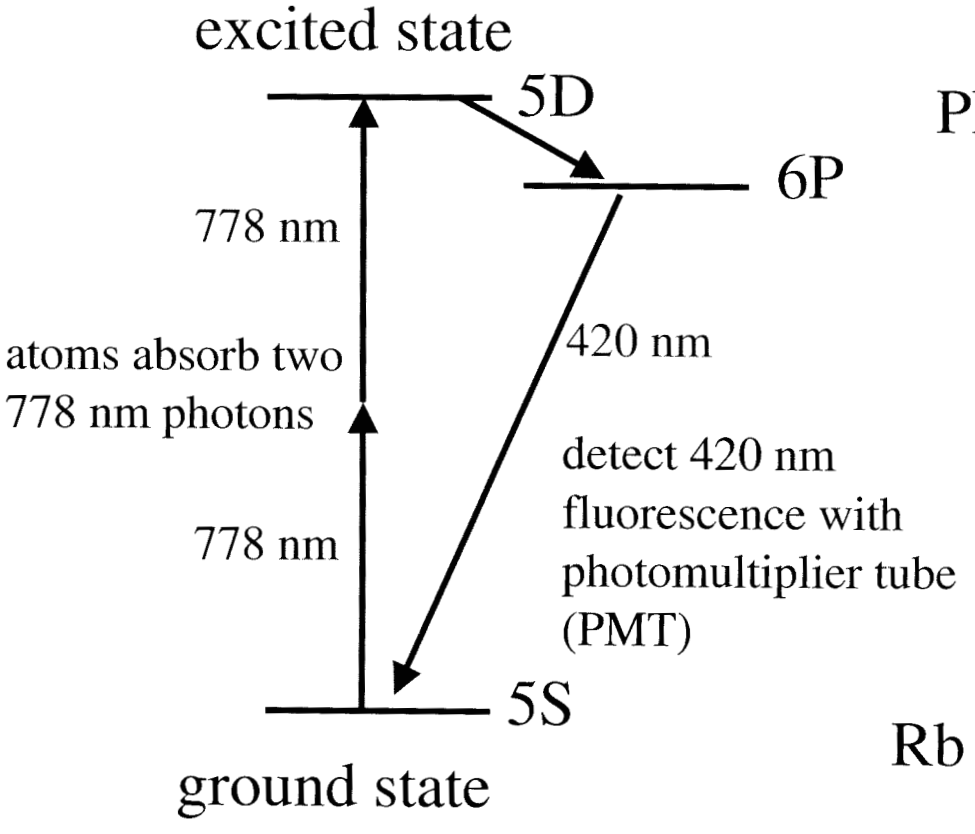

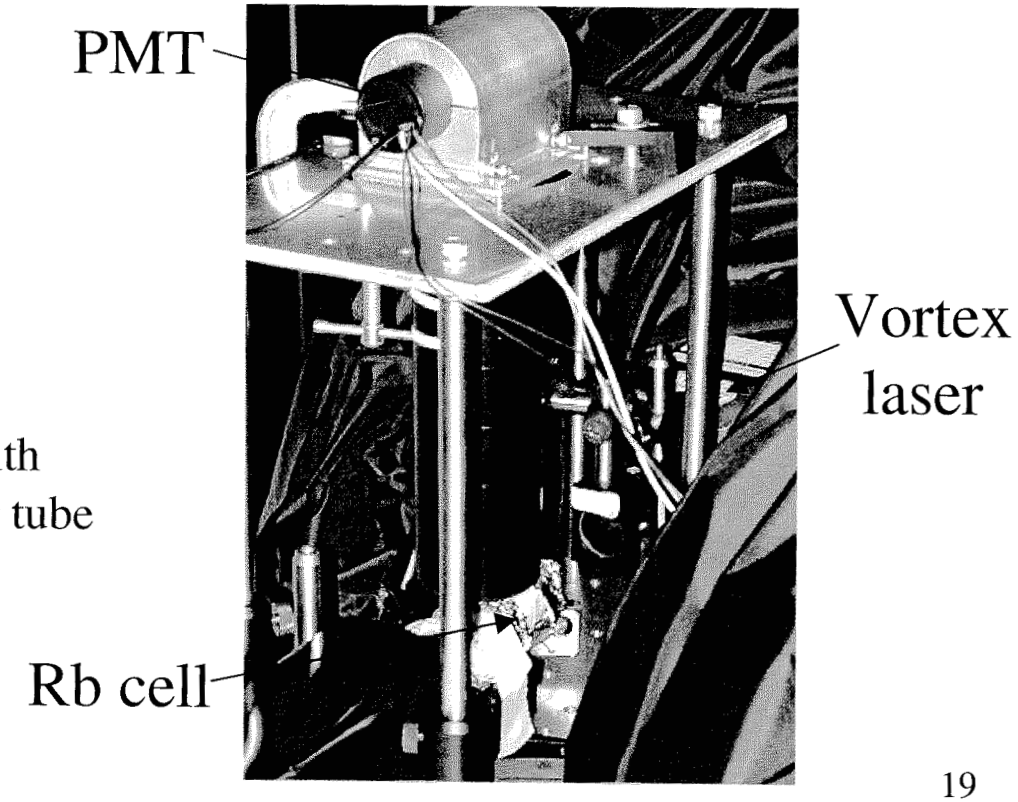

^{85}Rb & ^{87}Rb $5S_{1/2}$-$5D_{5/2}$ Transitions

Peak A is at 778. 108 nm

Peak B is at 778.107nm

Peak C is at 778.103 nm

Peak D is at 778.100 nm

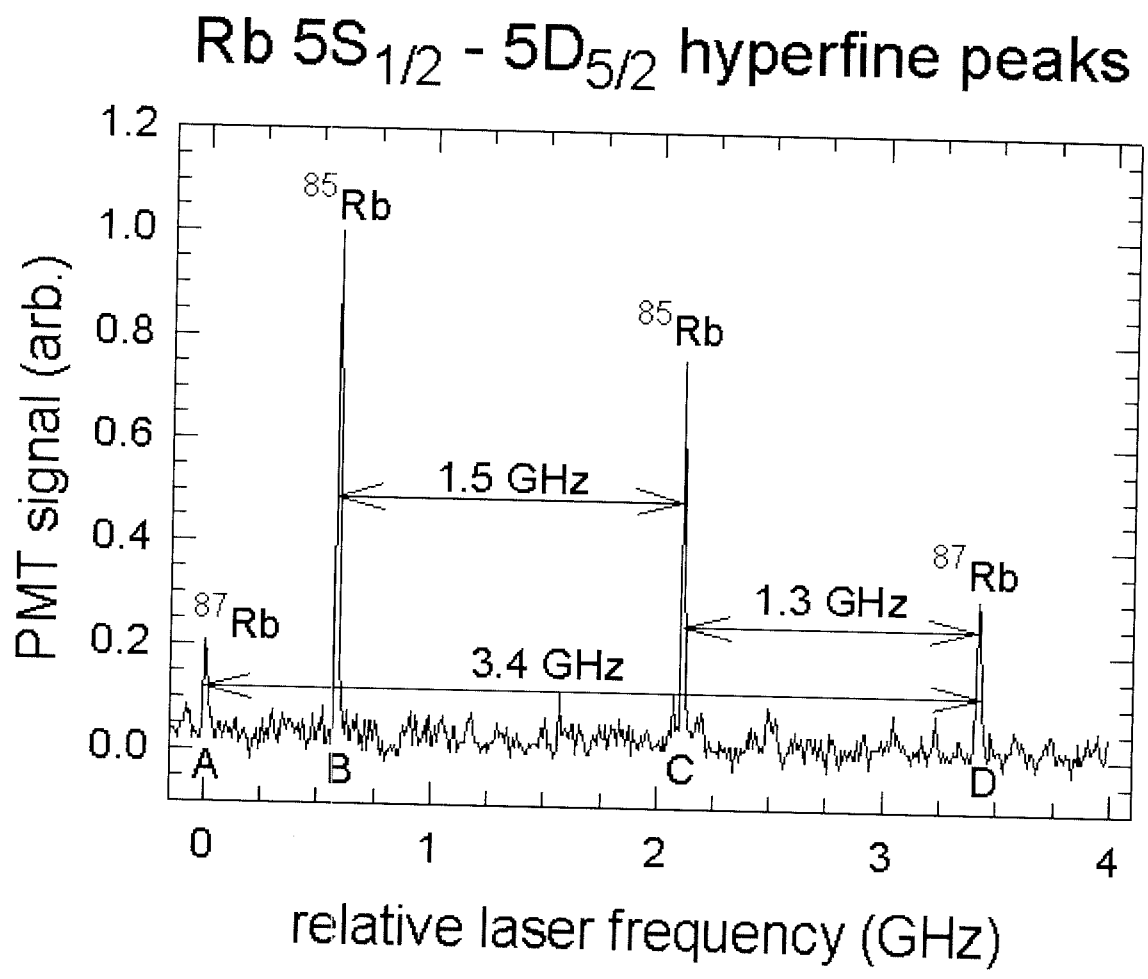

Measured with a Burleigh WA100 wavemeter

Hyperfine components of Peak A

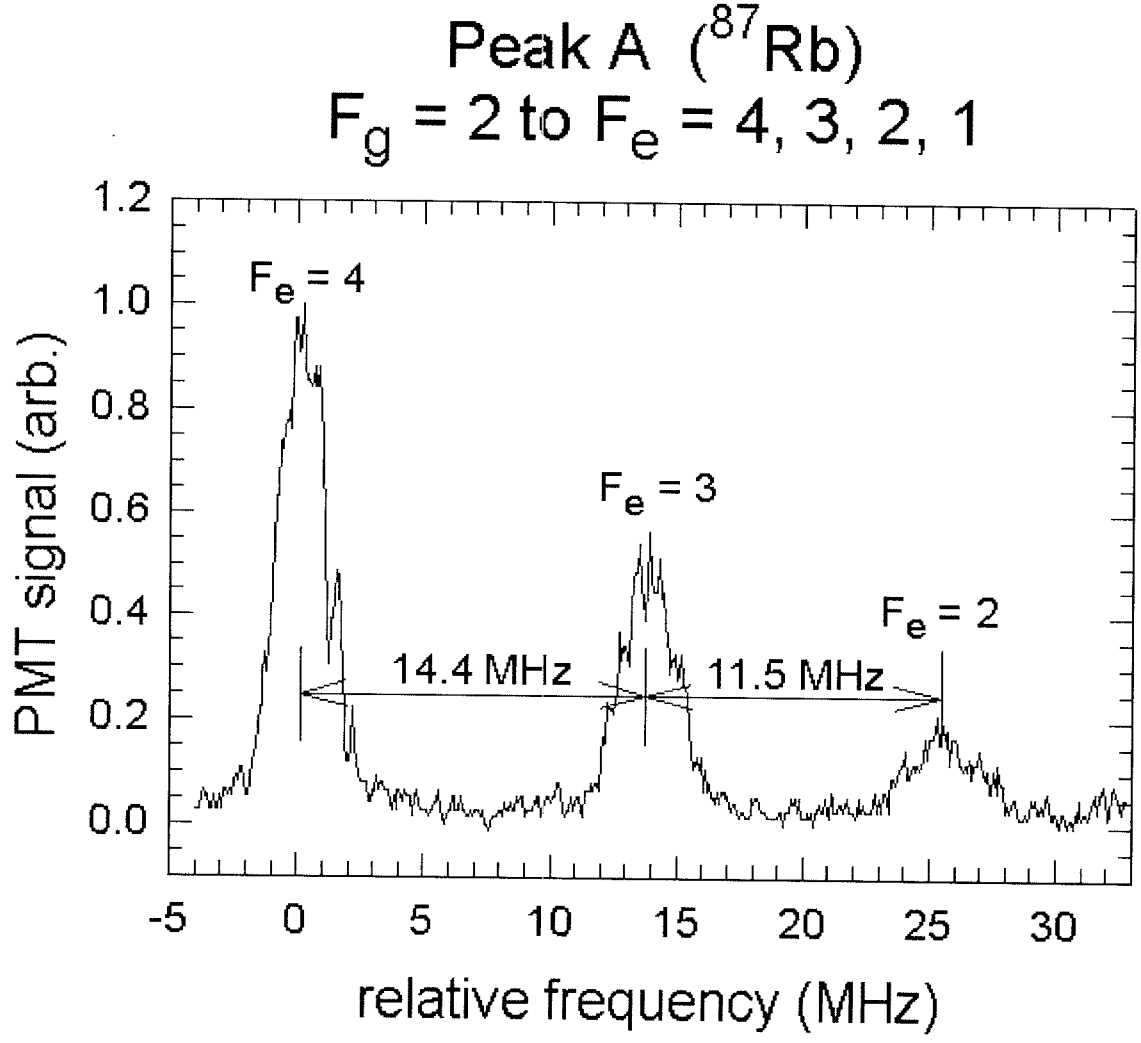

Transition linewidth consistent with laser frequency noise

Frequency identifications from F. Nez *et al.*, Opt. Commun. **102**, 432 (1993).

Laser lock electronics design
Block diagram

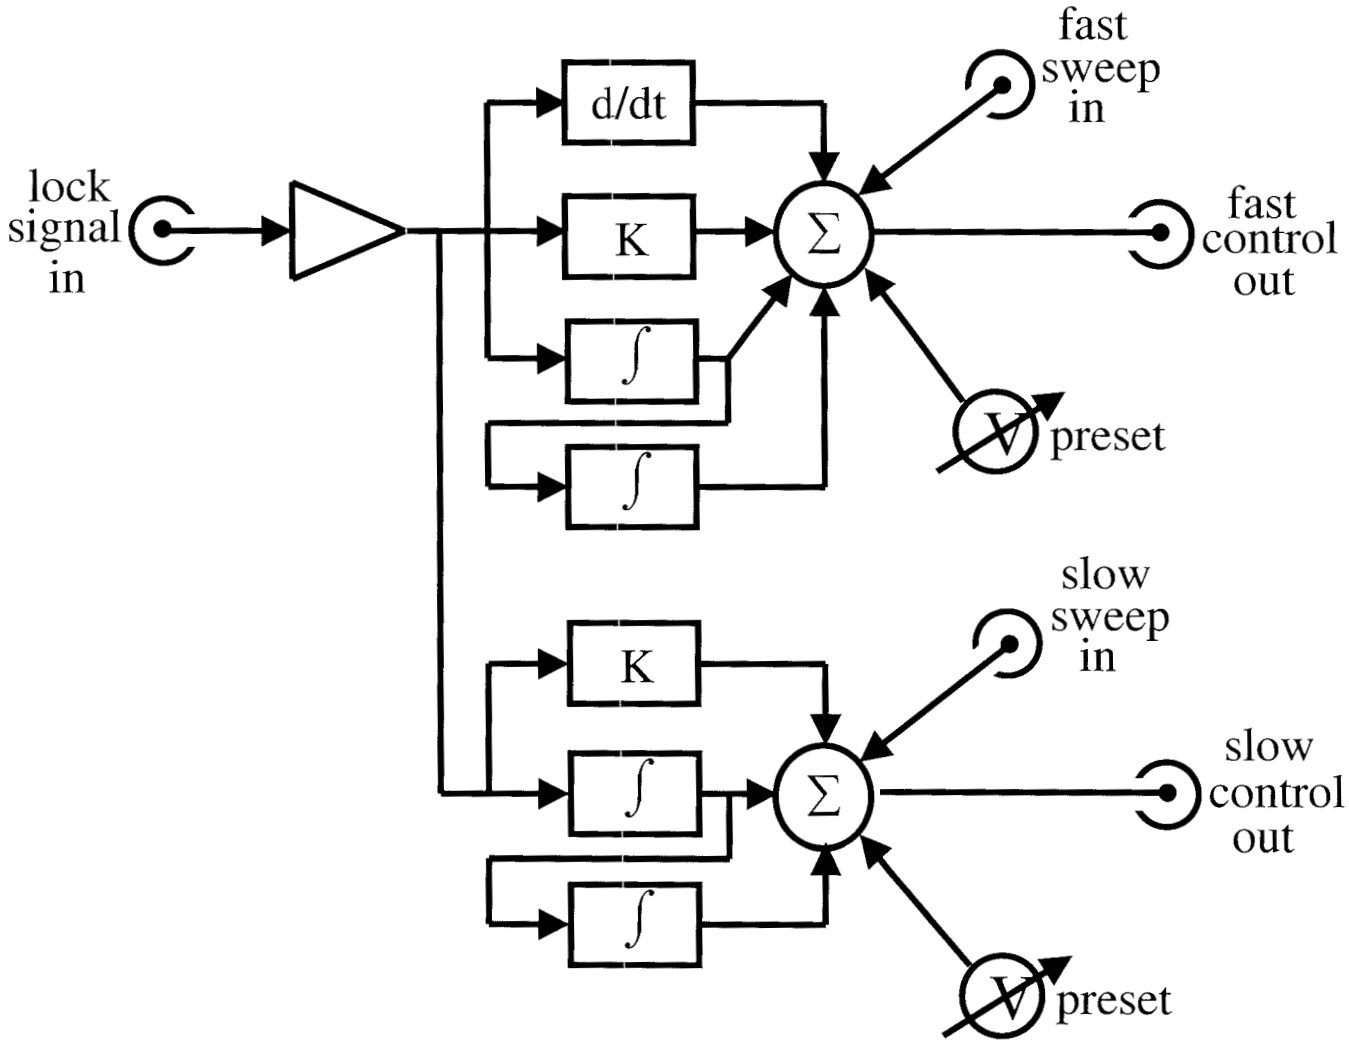

Characterize Fabry-Pérot cavities

Measure optical decay time for cavities with 532 nm mirrors:

Cavity #1: $\tau_{1/e} = 18\ \mu s$

$\Rightarrow$ 1-R = 21 ppm; F = 150,000; $\Delta\nu = 8.8$ kHz, $Q = 6.4\times10^{10}$

Cavity #2: $\tau_{1/e} = 26\ \mu s$

$\Rightarrow$ 1-R = 14 ppm; F = 220,000; $\Delta\nu = 6.1$ kHz , $Q = 9.2\times10^{10}$

Cavity #1 decay time

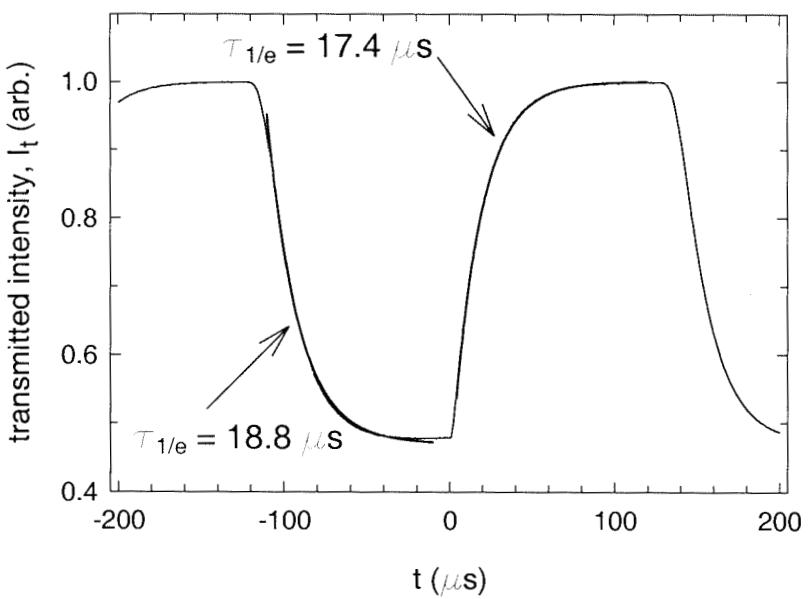

Cavity #2 decay time

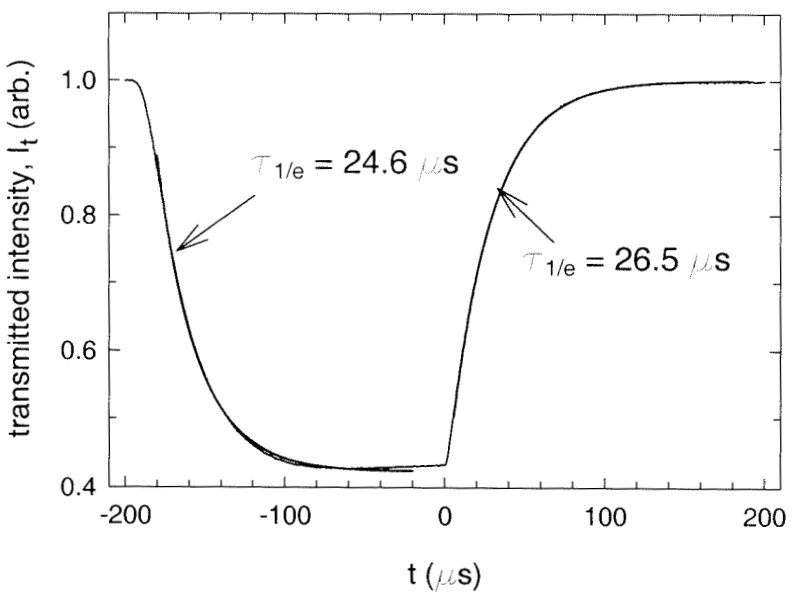

incident light: $\tau_{rise} = 0.6\ \mu s$, $\tau_{fall} = 8\ \mu s$

Performance of cavity lock servo

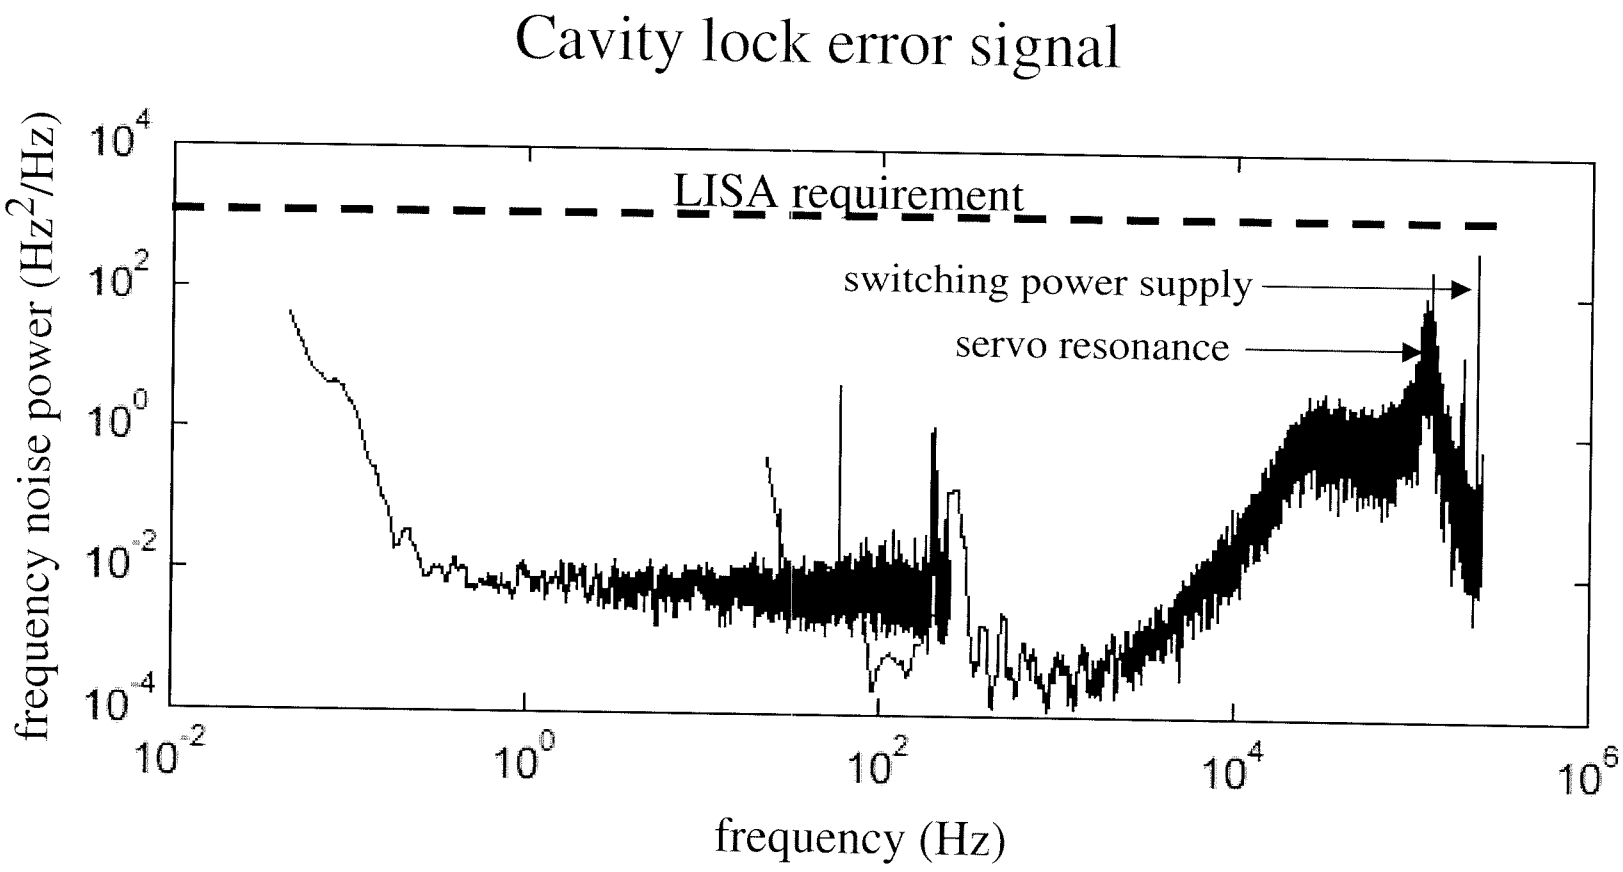

Performance of cavity lock servo

Cavity lock error signal

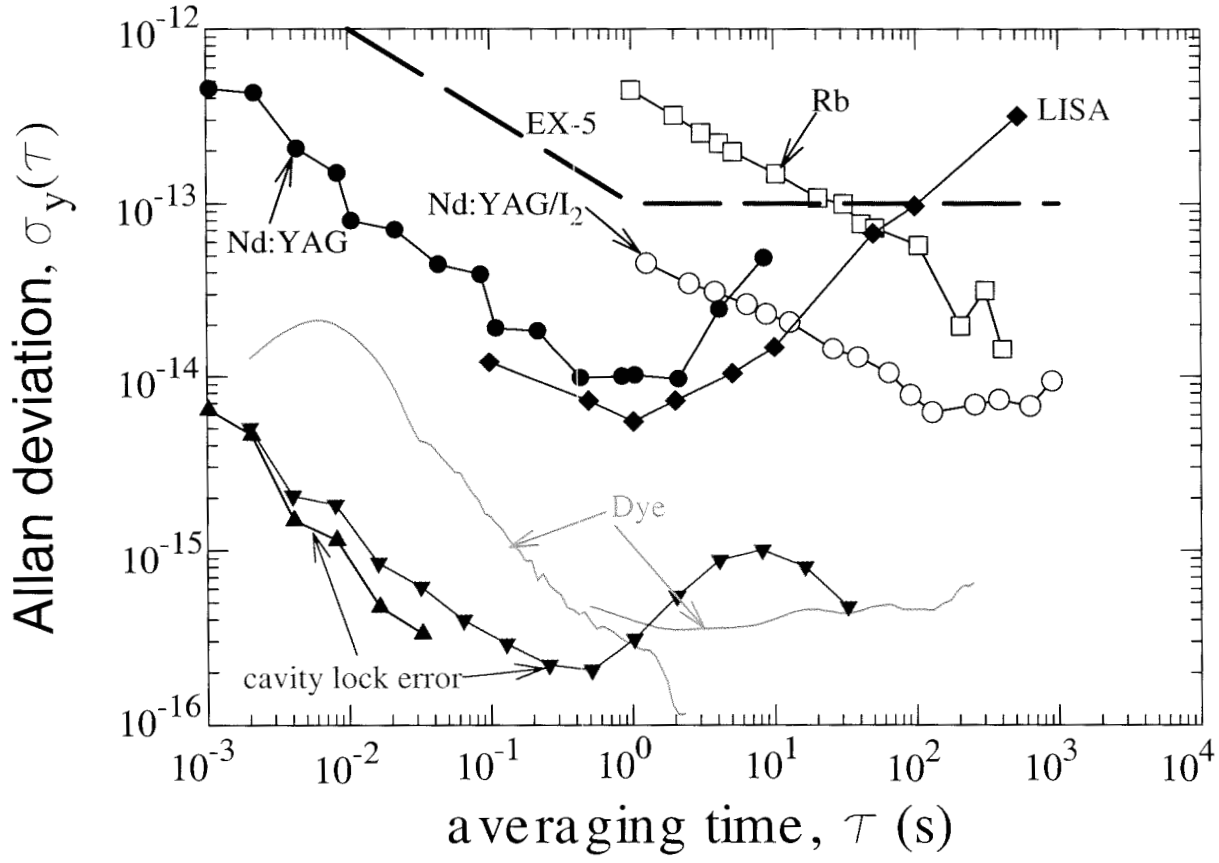

Nd:YAG ----- Sampas *et al.*, Opt. Lett. **18**, 947 (1993)
Nd:YAG/I$_2$ -- Hall *et al.*, IEEE Trans. Instrum. Meas. **48**, 583 (1999)
Rb ---------- Touahri *et al.*, Optics Comm. **133**, 471 (1997)
Dye ---------- Young *et al.*, Phys. Rev. Lett. 82, 3799 (1999)
LISA ---------- Peterseim *et al.*, private communication
EX-5 ---------- EX-5 requirement

Conclusions

EX-5 laser development:

- Surveyed laser systems for best candidates for space applications
- Constructed laser systems at 1064 nm and 778 nm
- Frequency-doubled from 1064 nm to 532 nm
- Observed atomic resonances in iodine and rubidium
- Designed and assembled vacuum systems for Fabry-Pérot cavities
- Designed and fabricated cavity components for 532 nm, 1064 nm, and 778 nm
- Completed design and construction of cavity-lock servo
- Assembled two cavities for 532 nm, evacuated, and tested
- Characterized Fabry -Pérot cavities
- Completed preliminary tests of cavity-lock servo

Looking Forward

EX-5 laser development:

- Complete the optimization of servo gains for cavity lock
- Finish assembling input optics for 2nd cavity system
- Measure short-term stability of Fabry-Pérot cavities
- Assemble and test servo for iodine/rubidium lock
- Measure long-term stability of hybrid laser stabilization system